




2x RHS150x4x10129 1033 + 1032 szt:2; lustrzane odbicie poz.76,105,107,104,108.
1:10 S235JR

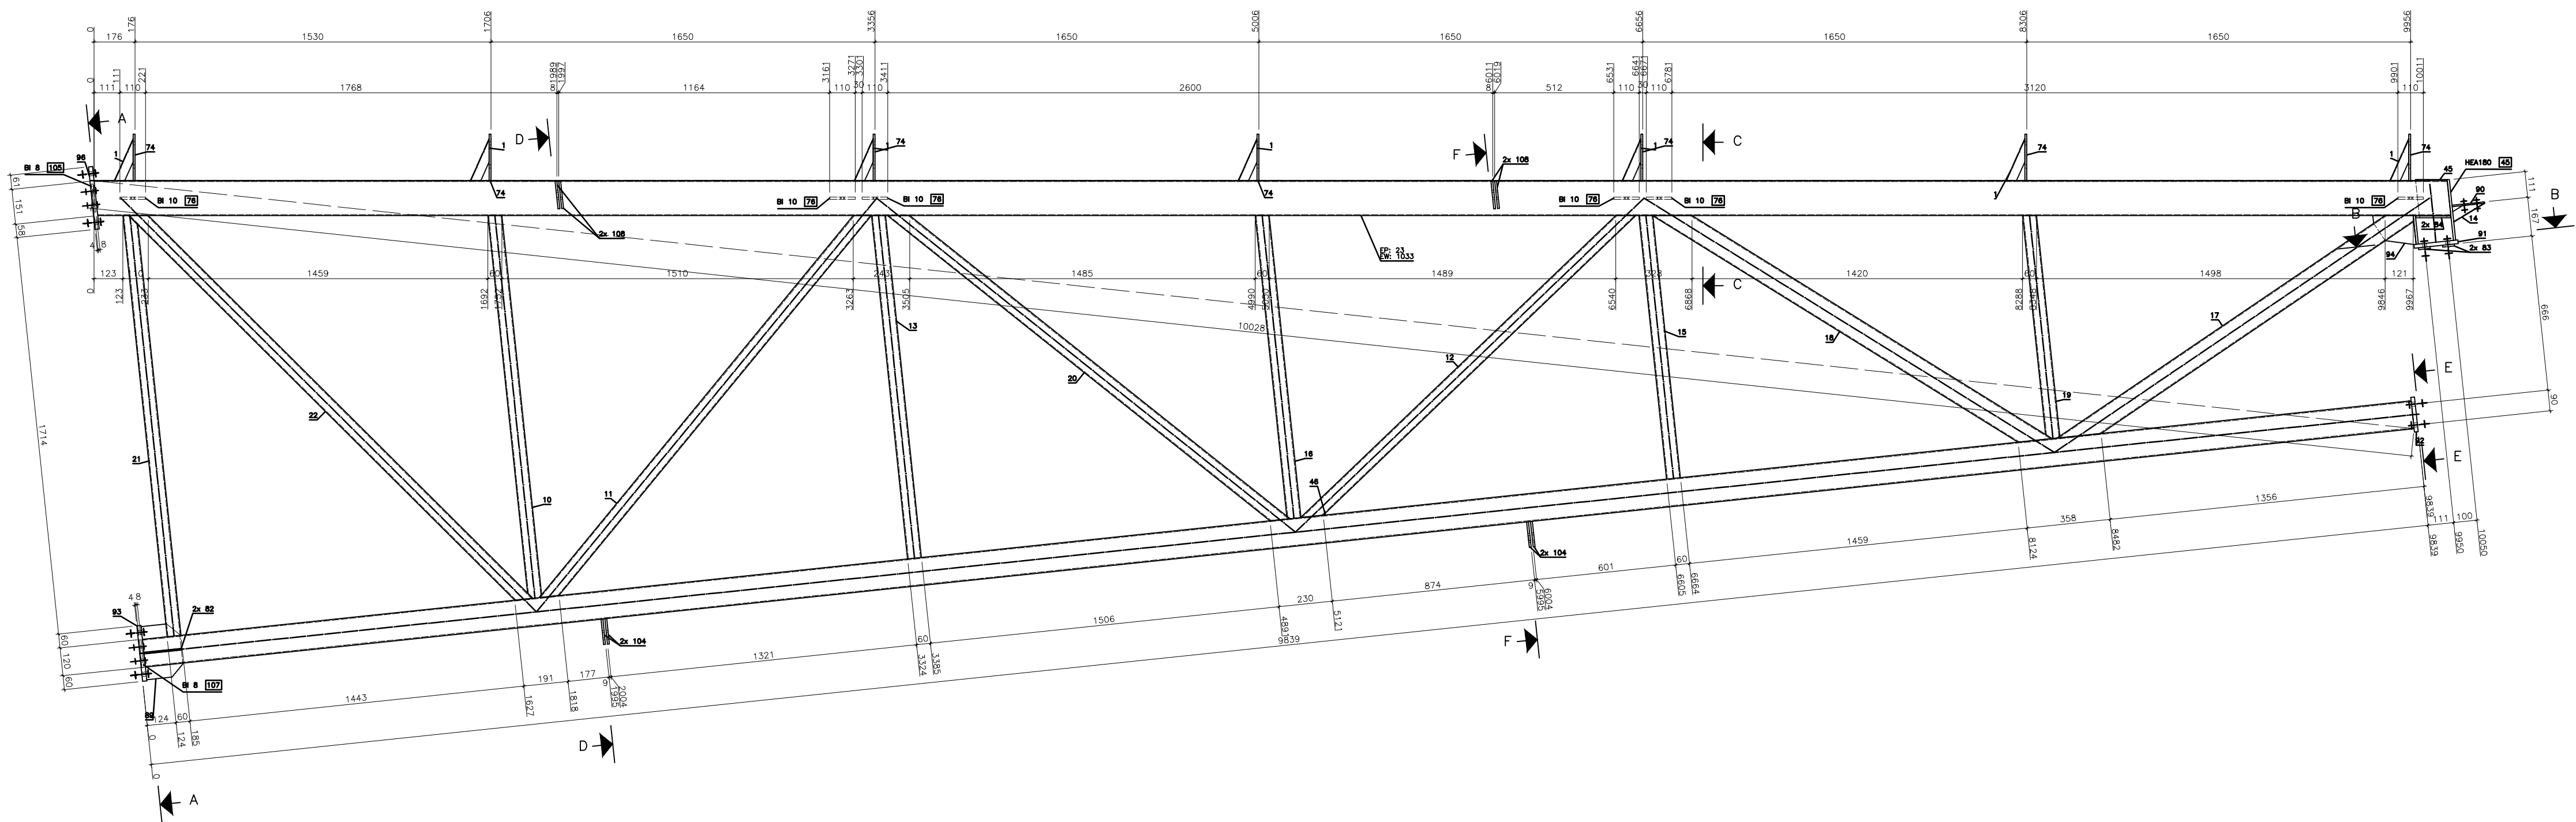


Przekrój A – A

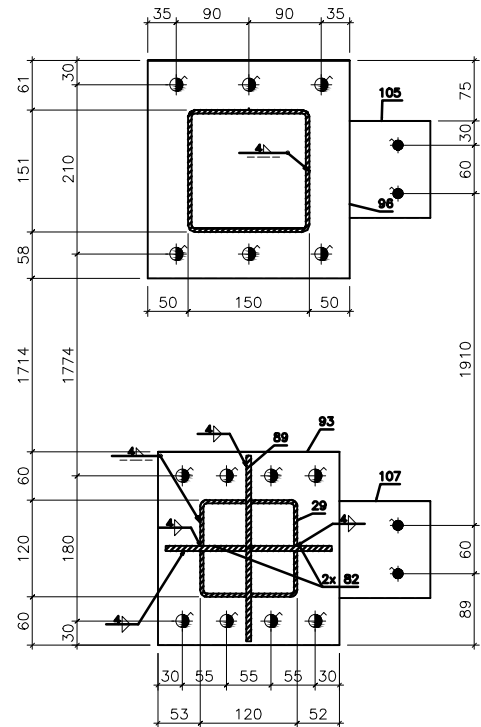


Przekrój B – B

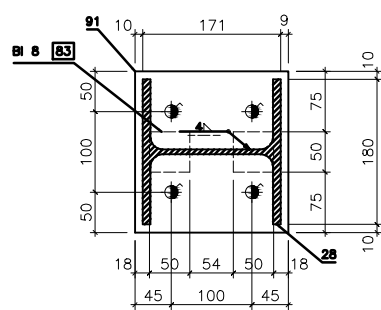


Przekrój D – D

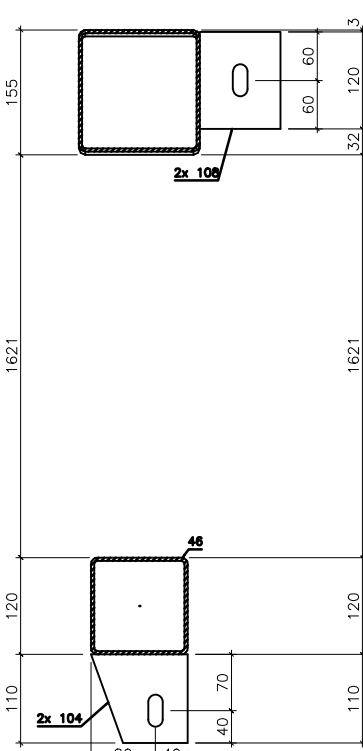


Przekrój F – F

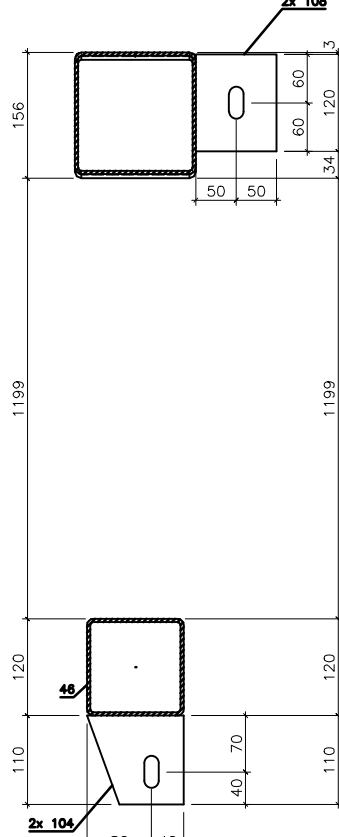


Przekrój E – E



Przekrój C – C

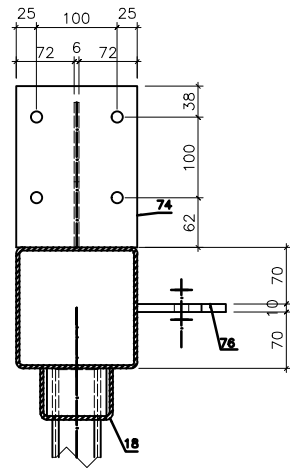

2x RHS150x4x10129 1032
1:25 S235JR

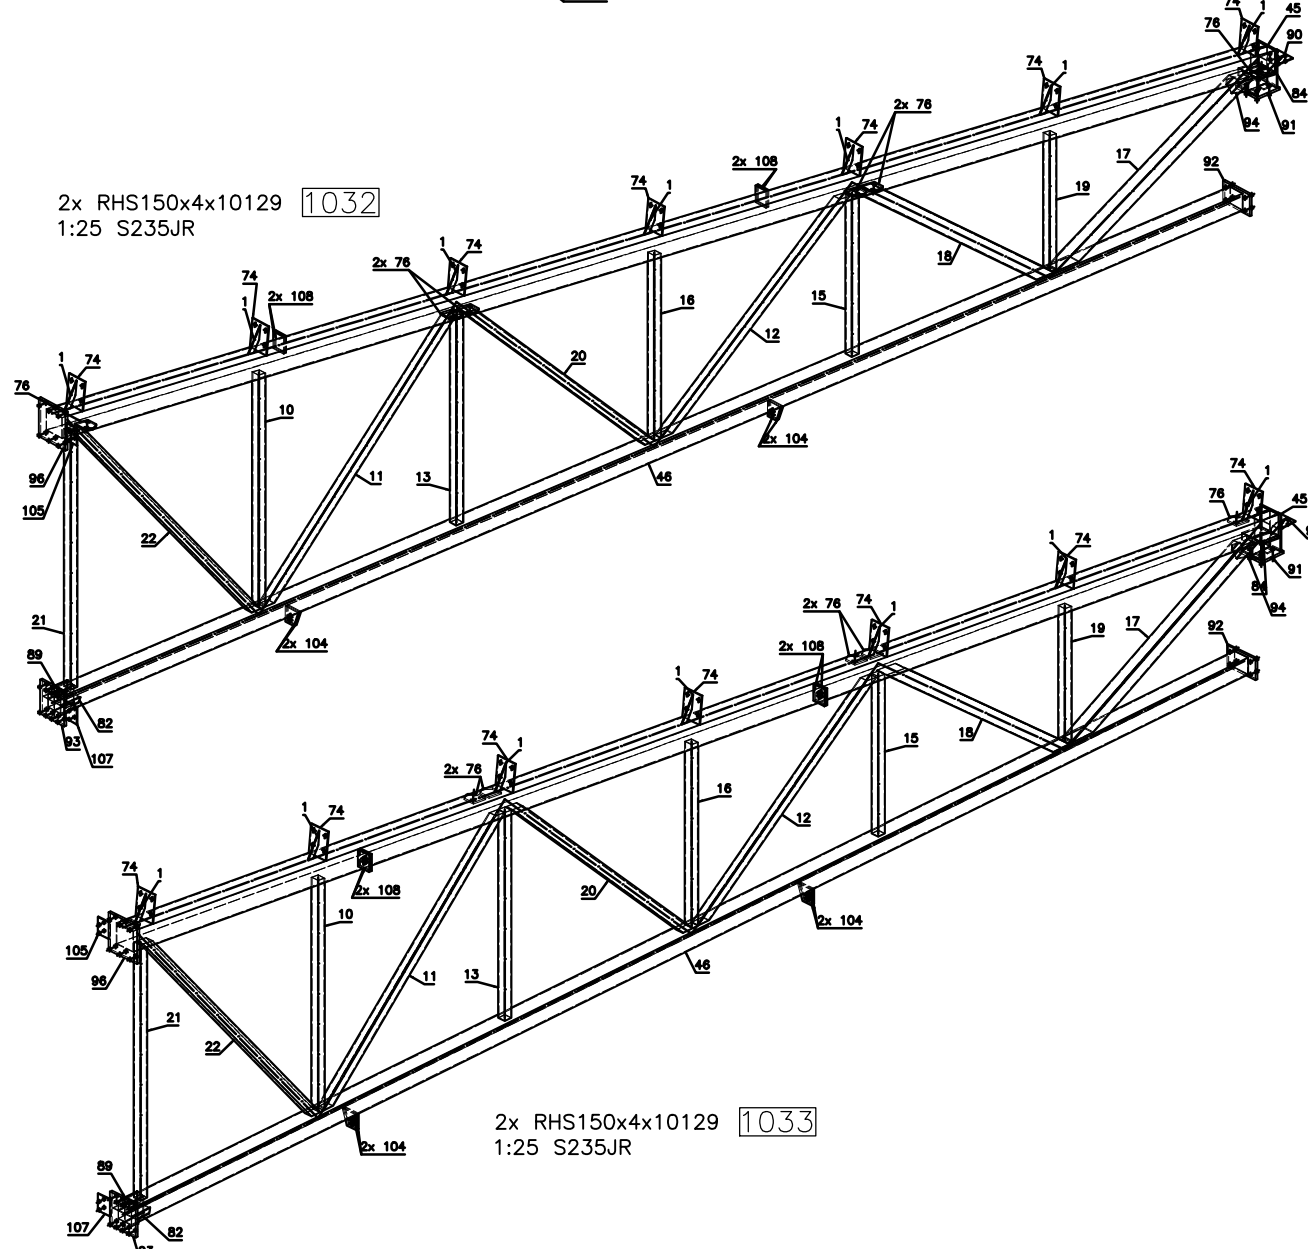

2x RHS150x4x10129 1033
1:25 S235JR

Pozycja	Nazwa	Ilość (szt.)	Długość (mm)	Szerokość (mm)	Materiał	Waga (kg)	Powłoka
1033	RHS150x4	2					
23	RHS150x4	1	10129.1	0	S235JR	182.32	5.94
108	BL8x120x100	4	120	100	S235JR	0.75	0.03
104	BL8x120x110	4	120	110	S235JR	0.89	0.03
14	PL40x6	1	154.6	0	S235JR	0.29	0.01
90	BL6x150x140	1	150	140	S235JR	0.99	0.05
74	BL8x200x150	7	200	150	S235JR	1.88	0.07
1	PL40x6	7	197	0	S235JR	0.37	0.02
92	BL16x250x150	1	250	150	S235JR	4.71	0.09
96	BL18x270x250	1	270	250	S235JR	9.54	0.15
93	BL18x240x225	1	240	225	S235JR	7.63	0.12
89	BL6x230x162	1	230	161.5	S235JR	1.62	0.07
46	RHS120x4	1	9804.5	0	S235JR	139.22	4.57
19	RHS60x4	1	966.6	0	S235JR	6.49	0.22
15	RHS60x4	1	1139	0	S235JR	7.64	0.26
16	RHS60x4	1	1311.4	0	S235JR	8.8	0.3
13	RHS60x4	1	1483.7	0	S235JR	9.96	0.34
10	RHS60x4	1	1656.1	0	S235JR	11.11	0.37
21	RHS60x4	1	1820.1	0	S235JR	12.21	0.41
17	RHS90x4	1	1804	0	S235JR	18.94	0.62
18	RHS90x4	1	1965.4	0	S235JR	20.64	0.68
12	RHS60x4	1	1938.7	0	S235JR	13.01	0.44
20	RHS60x4	1	2164.7	0	S235JR	14.53	0.49
11	RHS60x4	1	2174.9	0	S235JR	14.59	0.49
22	RHS60x4	1	2391.2	0	S235JR	16.05	0.54
82	BL6x160x100	2	160	100	S235JR	0.71	0.03
94	BL8x172x142	1	172.3	142.1	S235JR	1.15	0.04
84	BL8x150x90	2	150	90	S235JR	0.84	0.03
83	BL8x50x50	2	50	50	S235JR	0.16	0.01
91	BL16x200x190	1	200	190	S235JR	4.77	0.09
45	HEA180	1	277	0	S235JR	9.84	0.28
76	BL10x110x110	6	110	110	S235JR	0.83	0.03
107	BL8x120x113	1	120	112.5	S235JR	0.85	0.03
105	BL8x120x100	1	120	100	S235JR	0.75	0.03
Razem:		59				523.88	16.86